

## Frequently Asked Questions Cerberus FIT FC120

### Onderwerp: Van Nederlandse settings naar fabrieksinstelling

**Productlijn: Cerberus Fit**

**Distributie: CPS FS**

**Datum: 10 aug 2016**

Standaard wordt de Cerberus FIT geleverd als een voorgedefinieerde instelling: “ready to use” oftewel de Nederlandse setting. Nu komt het voor dat u een bepaalde instelling wilt gebruiken of aanpassen die niet in de Nederlandse beknopte “ready to use” technische handleiding wordt beschreven maar wel in de algemene (Engelstalige) technische handleiding.

Hieronder staan de stappen uitgelegd hoe je van de Nederlandse- naar de fabrieksinstelling kunt gaan.


Stap 1: Haal de 230V voeding en de accu los, zodat de brandmeldcentrale spanningloos is.

Stap2: Vervolgens houd je de volgende vier knoppen ingedrukt.

- Knop 3 accepteer
- Knop 4 zoemer uit
- Knop 8 annuleer
- Knop 9 ok / accepteer.

Stap 3: houd de vier knoppen ingedrukt en zet de 230V voeding weer aan. Wacht tot dat je een piep hoort en laat dan de vier knoppen los. Na het los laten van de knoppen dient je direct de accu weer aan te sluiten.

Stap 4: kies nu de standaard fabrieksinstelling.

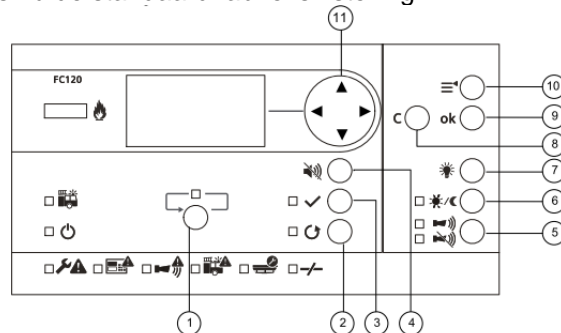

No.	Description	Function
1	MORE ALARM	Move to the next “fire alarm”
2	RESET	Resets the fire control panel to quiescent condition
3	ACKNOWLEDGE	<ul style="list-style-type: none"> <li>• Starts the investigation time V2 (AVC)</li> <li>• Silence the buzzer until a new alarm event occurs</li> <li>• Silence the sounder until a new event occurs (If programmed)</li> </ul>
4	SILENCE BUZZER	Silence the buzzer until a new event (alarm, alert or fault) occurs
5	SILENCE	• Silence the sounder control (s) in the event of alarm
	RESOUND	<ul style="list-style-type: none"> <li>• Manually re-activate the sounder control (s) during alarming</li> <li>• If programmed, activation of all sounder control (s) (activation mode only in quiescent condition)</li> </ul>
6	MANNED / UNMANNED	<ul style="list-style-type: none"> <li>• Switch between manned / unmanned</li> <li>• Cancel the alarm delay V1/V2 when V1 / V2 is running</li> </ul>
7	LAMP TEST	Activates all LEDs, the buzzer and the LCD on the PMI
8	CANCEL	Move one step back without change
9	OK	Confirm the selected value
10	MENU	Enter the main menu
11	NAVIGATION	<ul style="list-style-type: none"> <li>• Select the menu or change the time: &lt;▲&gt; and &lt;▼&gt;</li> <li>• Change the selection: &lt;◀&gt; and &lt;▶&gt;</li> <li>• Change to the next level or select value in the tick-box: &lt;▶▶&gt;</li> </ul>